



## 4'x6' Bike Shed Plan

---

# Compare our Free vs. Premium plan

This perfectly designed plan will guide you through the entire process of building your very own shed for any backyard or garden.



Check out the benefits you would get with our **premium edition**:

Features	Free plan	Premium edition
Steps count	13	22
Illustrations for Each Step	✓	✓
Print Ready	✓	✓
Step By Step Instructions	✓	✓
Full Materials and Cuttings List	✗	✓
Additional Illustrations	✗	✓
Additional Blueprints	✗	✓
Tools List	✗	✓
Fastening Elements List	✗	✓
Technical Support	✗	✓

[BUY NOW](#)

# 6'x8' Bike Shed Material List

## Site Preparation

- Concrete
- Bricks

## Bottom Frame

- Pressure-Treated Lumber
- Plywood

## Wall Frames

- Pressure-Treated Lumber

## Shed's Roof

- Pressure-Treated Lumber
- Pressure-Treated Board
- Plywood
- Building paper
- Asphalt shingles
- Metal drip edge

## Shed's Door

- Pressure-Treated Lumber
- Wood siding boards
- Plywood

## Walls Exterior Siding

- Pressure-Treated Lumber
- Wood siding boards

## Top Frame

- Pressure-Treated Lumber

## Fasteners & Hardware

- Door hinges
- Door pulls
- Surface bolt
- Screw-in Bicycle Hook
- Galvanized nails
- Wood screws

## STEP 1



# Foundation Preparation

**1.1** Clear the area where you want to build the shed and layout for the foundation. Use the below illustration as a guide.

**1.2** For the foundation, dig the trenches at least 1 feet wide and 1 feet deep.

**1.3** Fill the trenches to ground level with concrete and let cure, or harden. Since curing times vary between brands, read the packaging for recommended curing times.

**1.4** Once the concrete has cured, use standard-sized bricks and lay them across the foundation. You will need roughly 75 bricks for this step.

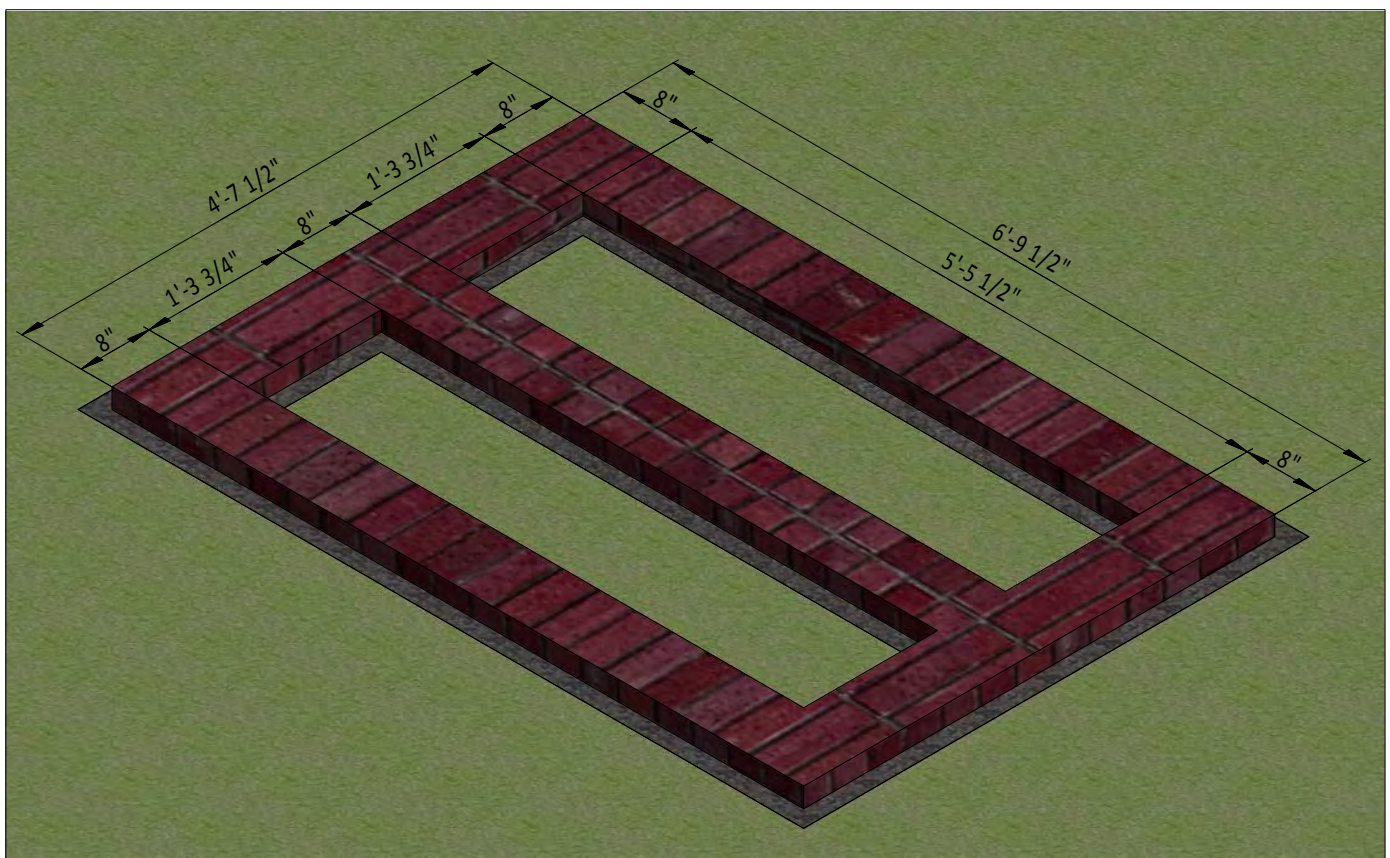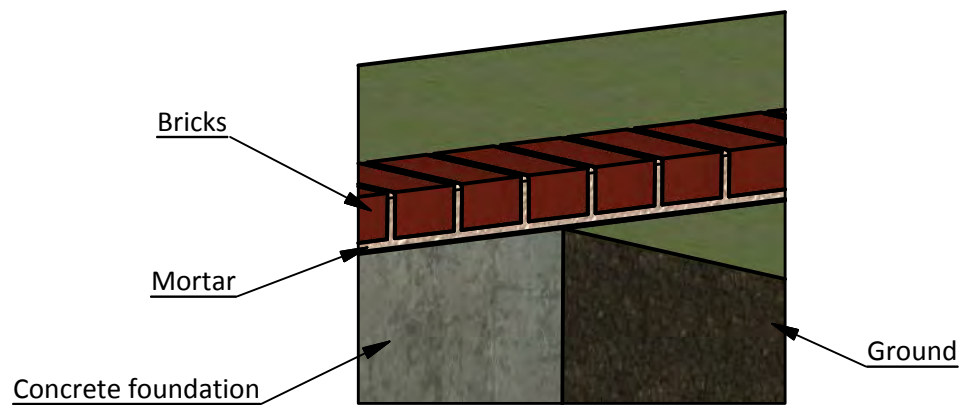


## STEP 2

### Framing the Floor

**2.1** Assemble the frame using  $1\frac{1}{2}$ " x  $7\frac{1}{4}$ " pressure-treated lumber. You will need two boards cut to 6'-2" that will be the rim joist and two boards cut to 3'-9" that will be the joist.

**2.2** Secure the beams with 8x5" wood screws.

**2.3** Using a speed square or carpenter's square, check the corners to make sure they are 90°.

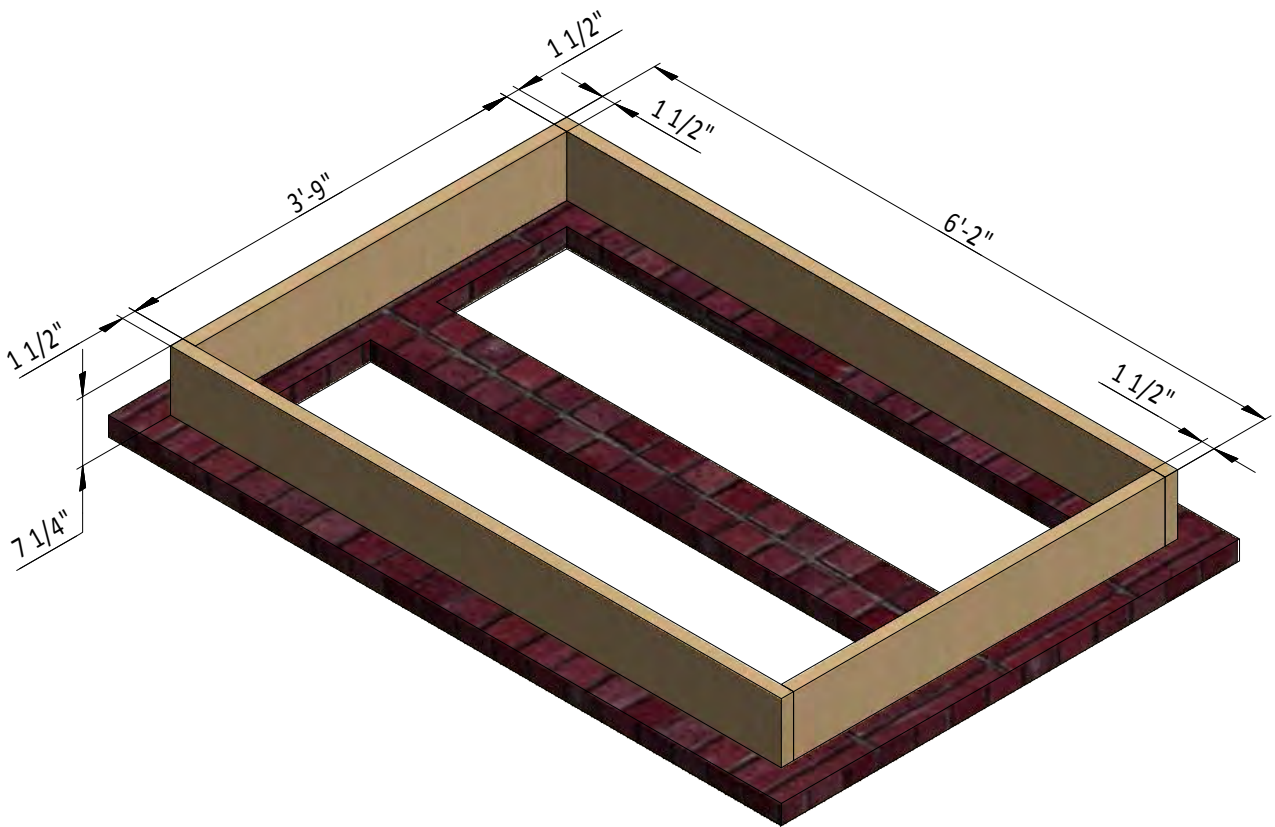


## STEP 3

### Install the Plywood Floor

**3.1** Prepare the 9/16" plywood for the floor sheathing according to the drawing. You will need one 4' x 6'-2" sheet.

**3.2** Secure the plywood with 2" wood screws.

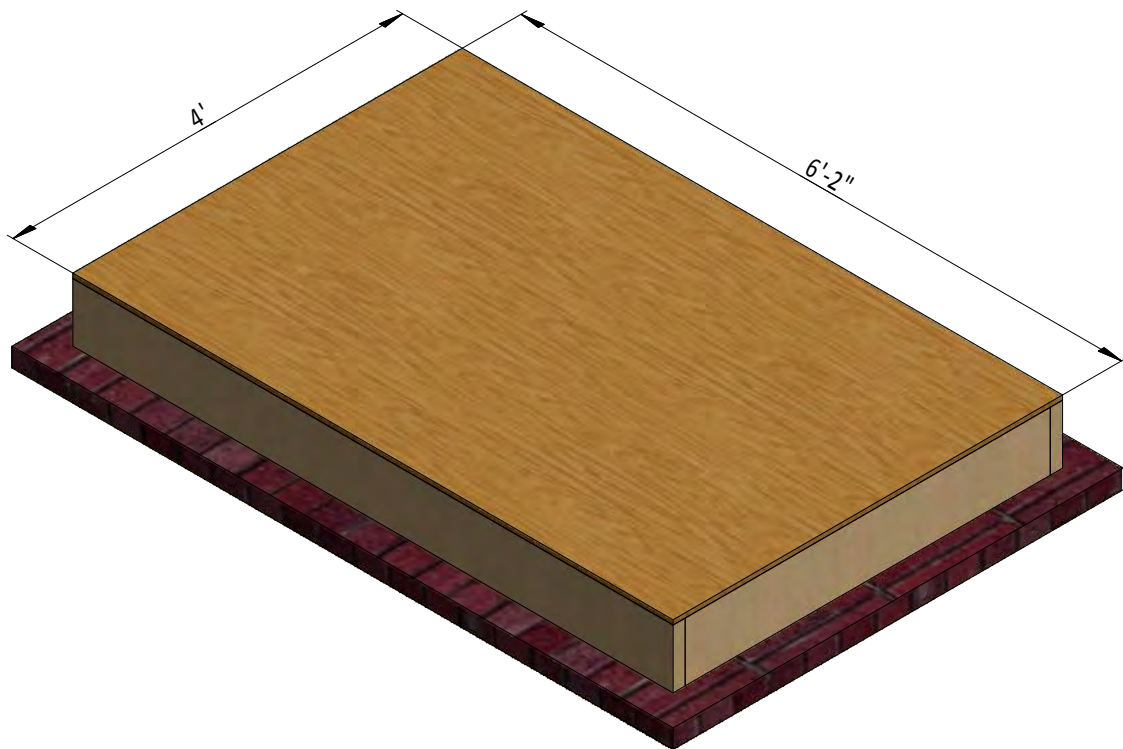




## STEP 4

### Assemble Front Wall Frame

**4.1** Using 1 1/2" x 3 1/2" and 3 1/2" x 3 1/2" pressure-treated lumber, construct front wall frame using the drawing below as a reference. You will need three boards cut to 11" that will be the cripple studs, one board cut to 5'-4" that will be the door header, four boards cut to 6'-11" that will be the studs, two boards cut to 5" that will be the bottom plates and one board cut to 6'-2' that will be the top plate.

**4.2** Connect the beams with 2x4" wood screws.

**4.3** Using a speed square or carpenter's square, check the corners to make sure they are 90°.

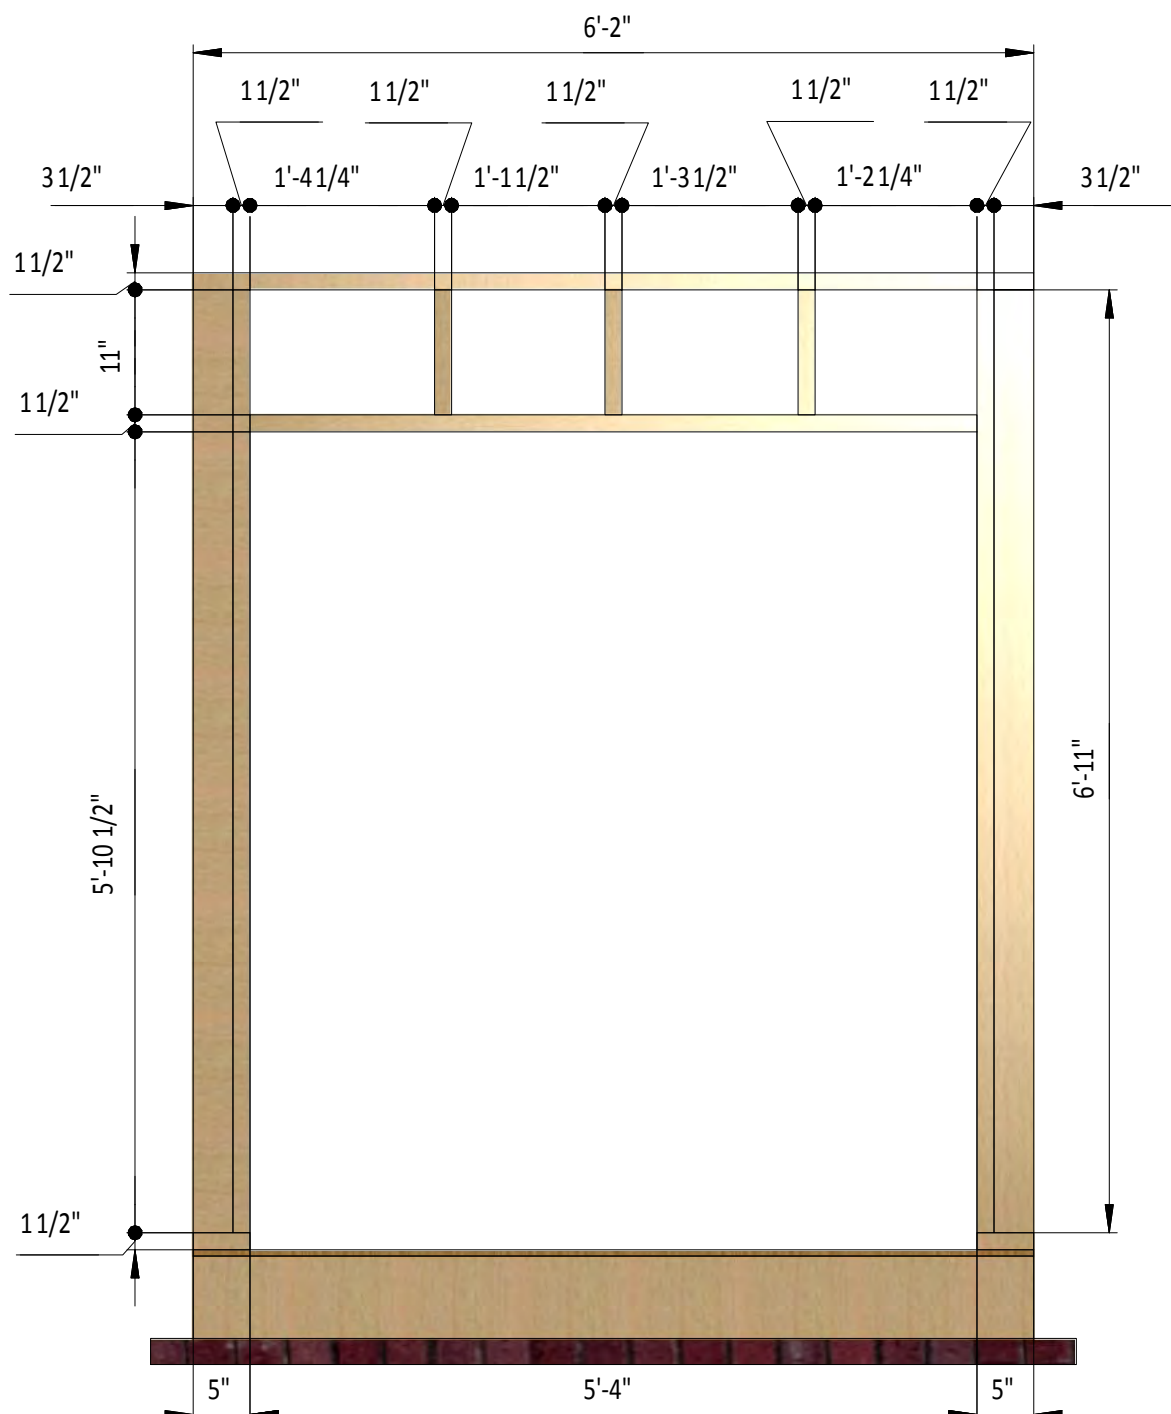


## STEP 5

### Assemble Back Wall Frame

**5.1** Using 1 1/2" x 3 1/2" and 3 1/2" x 3 1/2" pressure-treated lumber, construct back wall frame using the drawing below as a reference. You will need six boards cut to 6'-11" that will be the studs and two boards cut to 6'-2" that will be the top and bottom plates.

**5.2** Connect the beams with 2x4" wood screws.

**5.3** Using a speed square or carpenter's square, check the corners to make sure they are 90°.

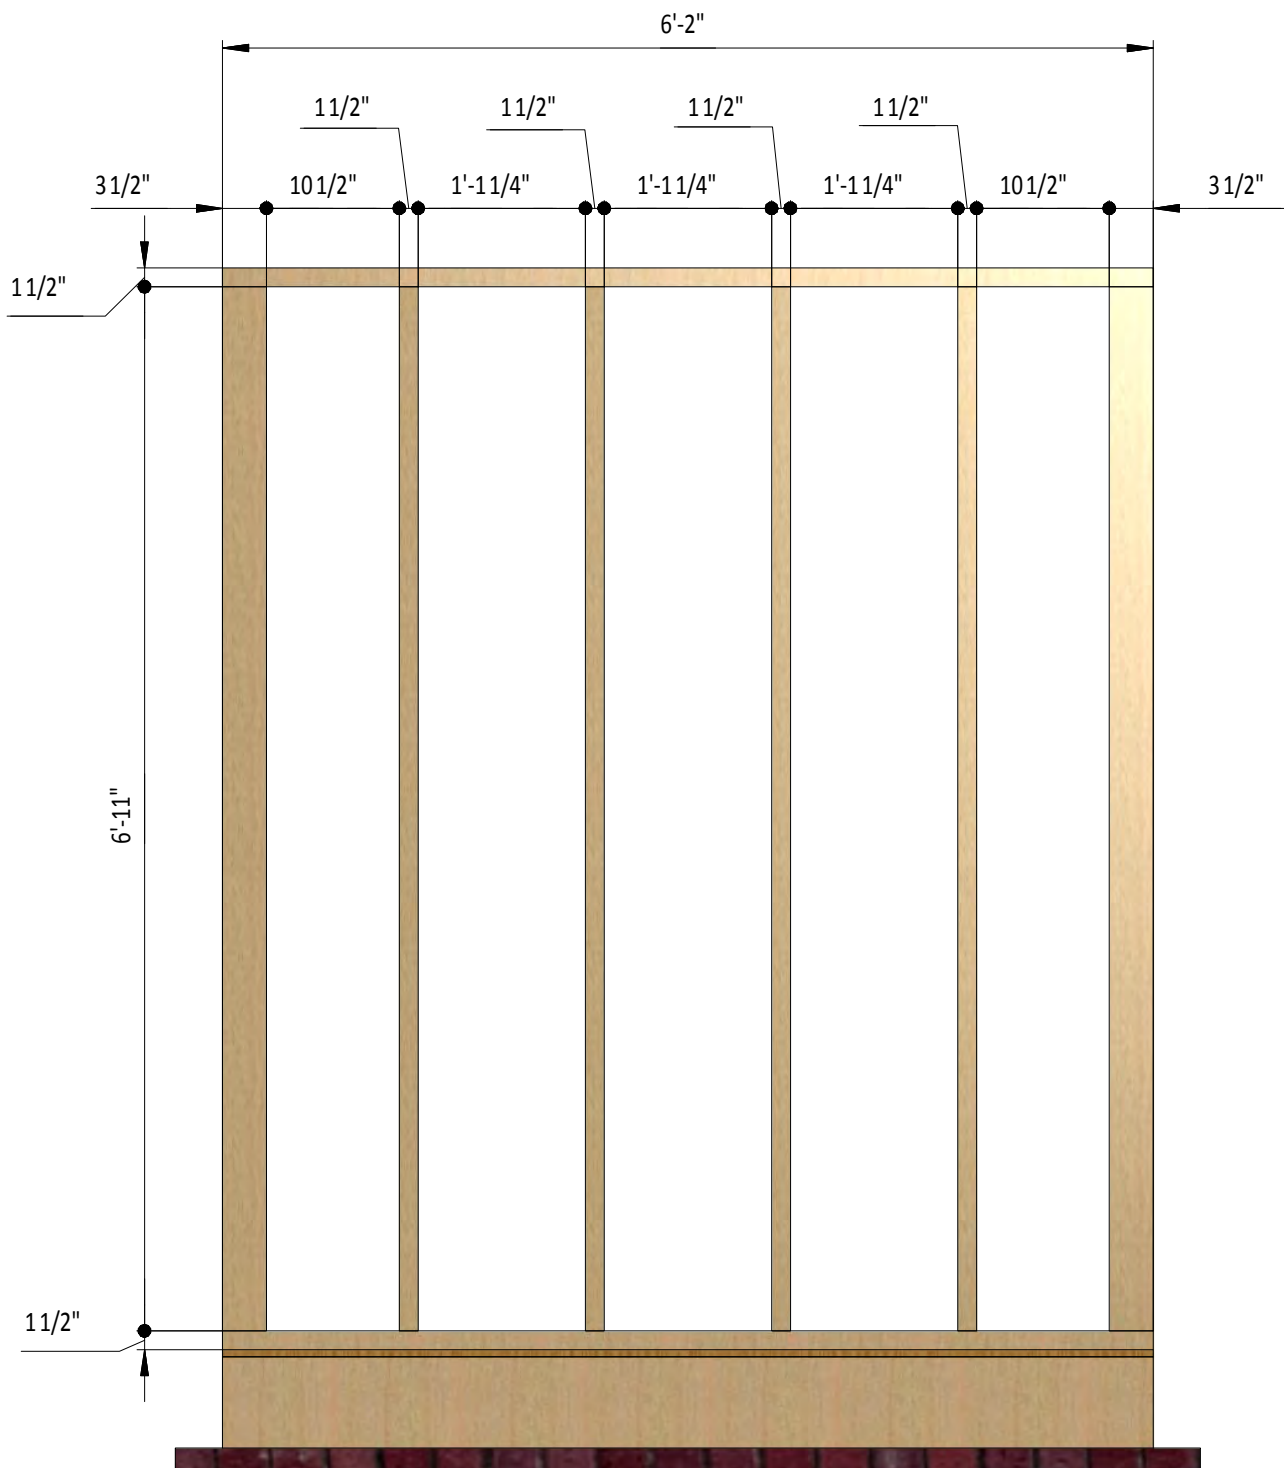




## STEP 6

### Assemble Left and Right Wall Frames

**6.1** Using 1 1/2" x 3 1/2" pressure-treated lumber, construct wall frames using the drawing below as a reference. You will need four boards cut to 6'-11" that will be the studs and two boards cut to 3'-5" that will be the top and bottom plates.

**6.2** Connect the beams with 2x4" wood screws.

**6.3** Using a speed square or carpenter's square, check the corners to make sure they are 90°.

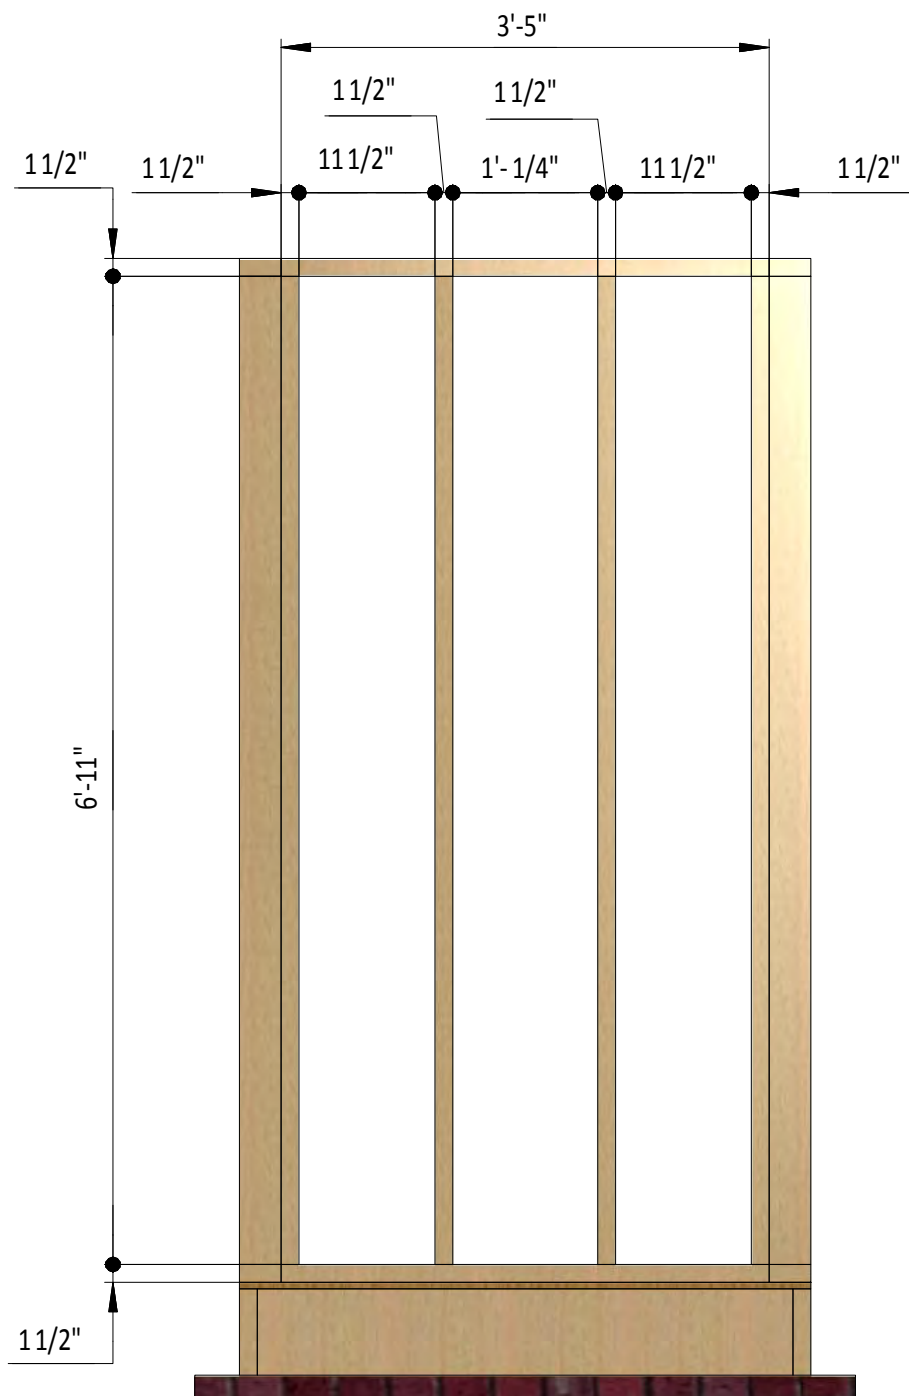

## STEP 7


### Assemble the Roof Frame

**7.1** Using 1 1/2 " x 5 1/2 " pressure-treated lumber, cut twelve rafters 3'-11 1/4" long according to the dimensions.

**7.2** Using 1 1/2 " x 3 1/2 " pressure-treated lumber, cut four collar ties 3' long according to the dimensions.

**7.3** Using 3/4 " x 7 1/4 " pressure-treated board, cut the ridge board 6'-2" long according to the illustration below.

**7.4** Connect the beams with 2x3" wood screws.

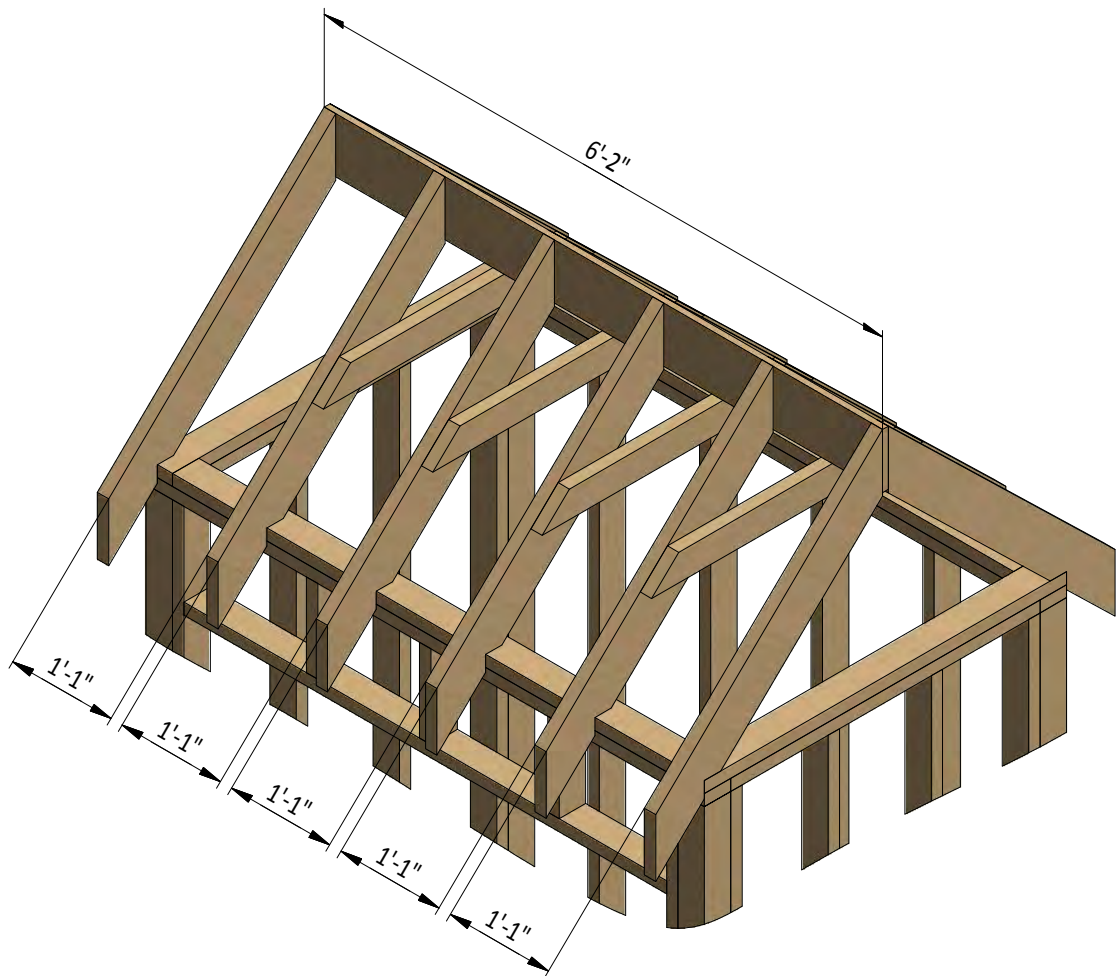

## STEP 8

### Install Plywood for the Roof

**8.1** Cut sheets of 9/16" plywood for the roof sheathing using the drawing below as a guide.

You will need two 4' x 6'-10" sheets.


**8.2** Secure the plywood with 2" wood screws.



## STEP 9

### Assemble and Install Shed Doors

- 9.1 Build the door frames for the shed using 1 1/2 " x 3 1/2 " pressure-treated lumber and secure with 5" wood screws. You will need two boards cut to 5'-11 3/4" that will be the vertical girts and two boards cut to 2'-3/4" that will be the horizontal girts.
- 9.2 Prepare the 9/16" plywood sheet with dimensions 2'-7 3/4" x 5'-11 3/4" for the doors according to the drawing.
- 9.3 Use 2 1/2 " x 3/4 " pressure-treated lumber for the door trim and fasten with 2" wood screws. You will need two boards cut to 2'-2 3/4" and two boards cut to 5'-11 3/4".
- 9.4 Using 1/4 " x 3/4 " pressure-treated lumber, cut and install a starter course 2'-2 3/4" long.
- 9.5 For the exterior siding on the door, use 1/2 " x 6" wood siding boards and the illustration below as a reference.
- 9.6 Assemble siding shields with 2" galvanized nails.
- 9.7 Install three 3" door hinges using 6x1" wood screws. Finish the doors installation by attaching 4" surface bolts and 6" door pulls.

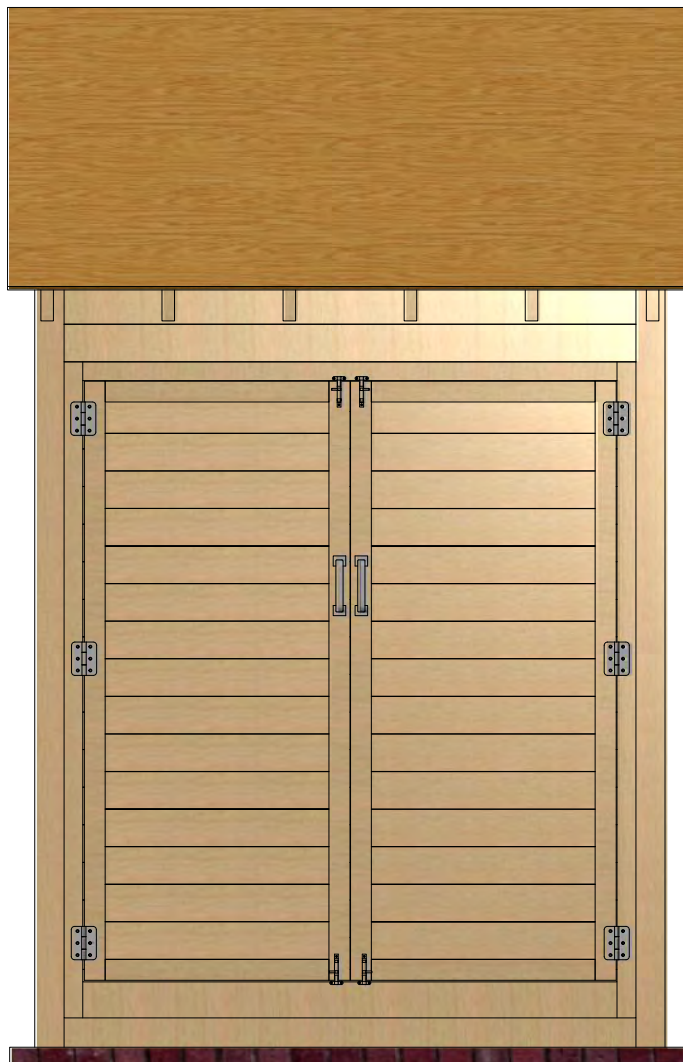


## STEP 10

### Shed's Side Wall Ventilation

**10.1** Install 12" x 12" wood square louver gable vent in the openings of side walls.

**10.2** Secure with 4x3" wood screws.

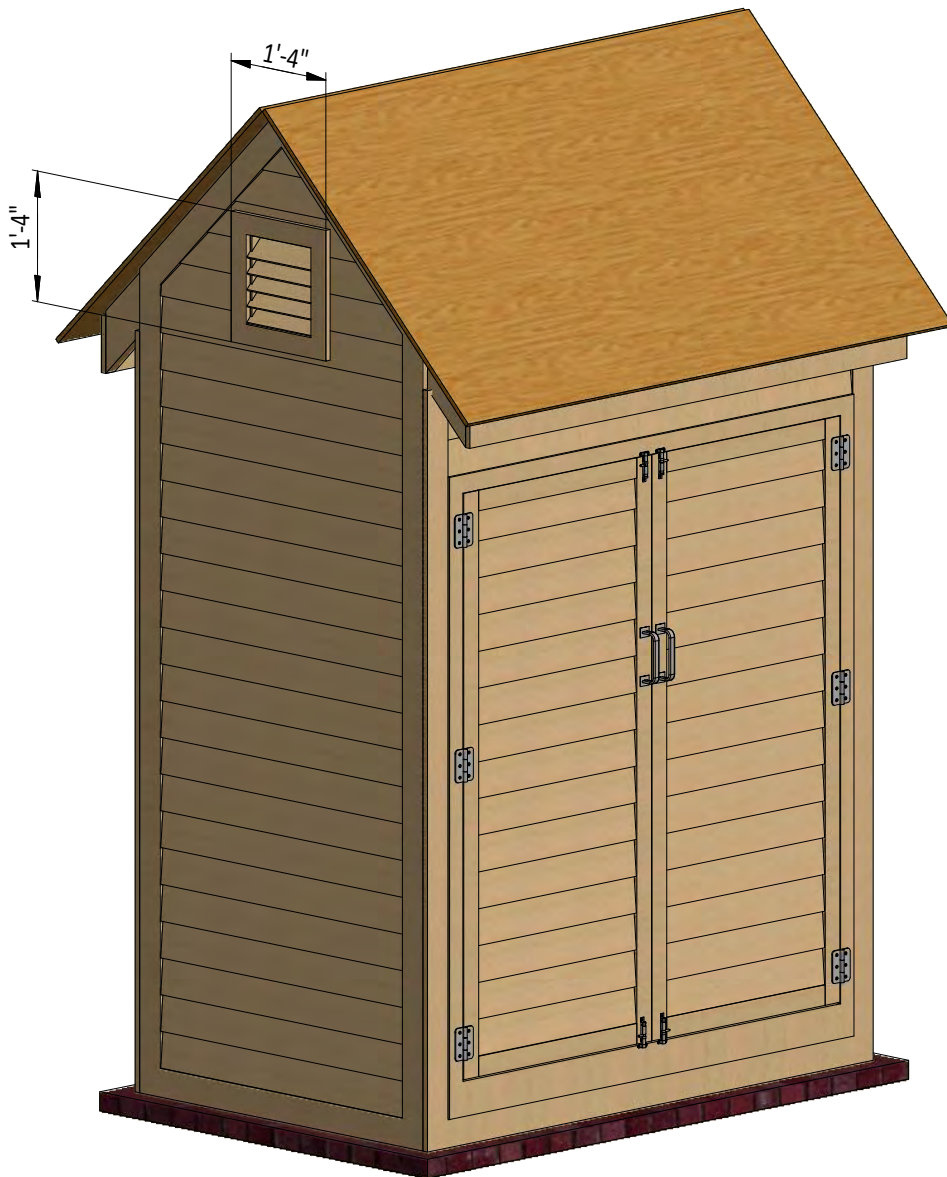




## STEP 11

### Roof Sheathing Installation

- 11.1 You will need 60 Sq Ft of asphalt shingle roofing.
- 11.2 Add the metal drip edge to the fascias.
- 11.3 Cover the plywood with building paper.
- 11.4 Install asphalt shingle roofing using an industrial stapler.

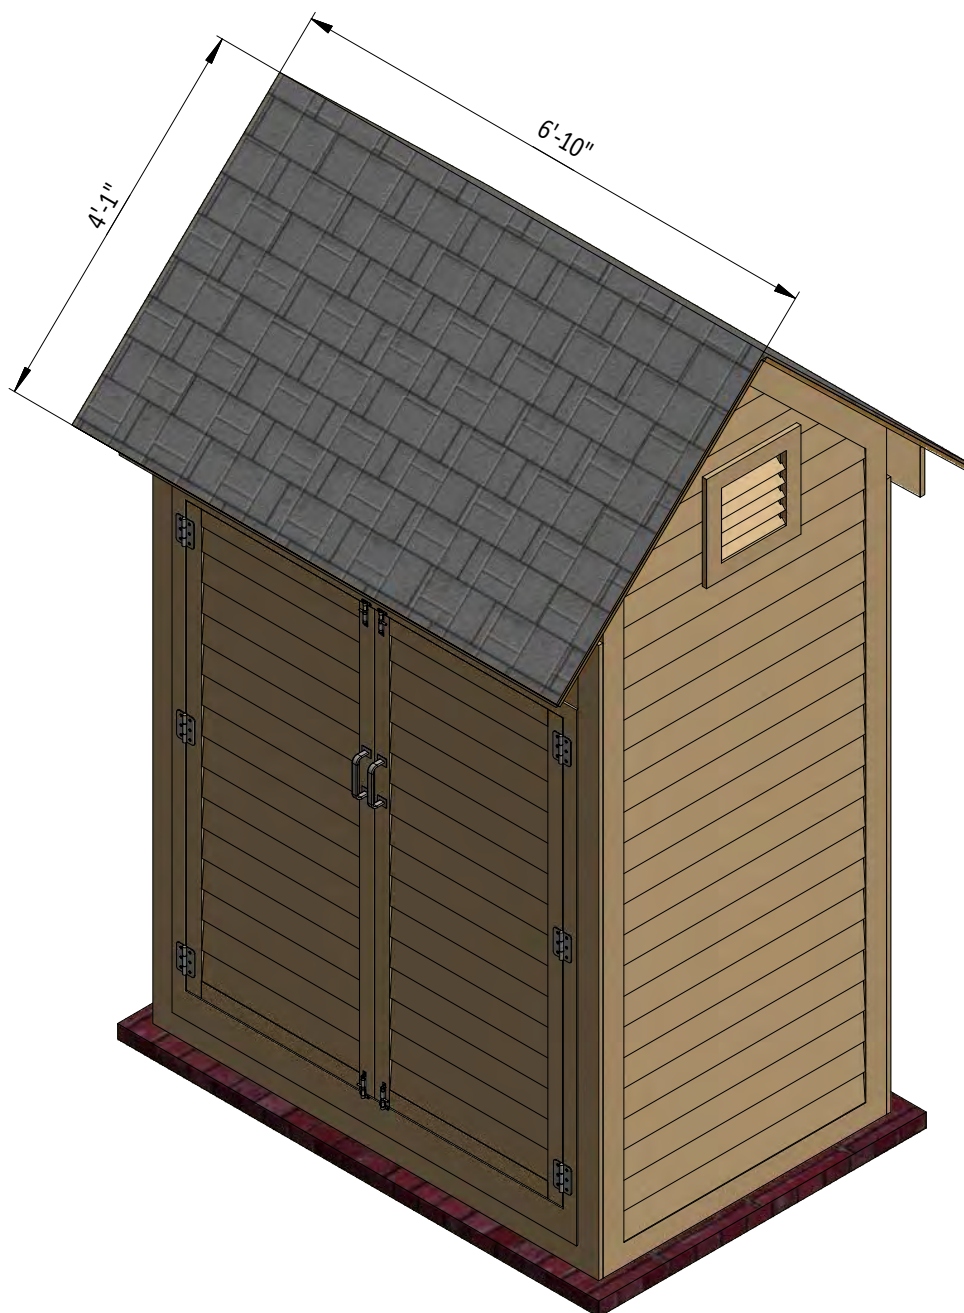



## STEP 12


### Assemble and Install Bicycle Storage Area

**12.1** Assemble bicycle storage area on the back wall studs.

You will need two 25 lb. Screw-in Bicycle Hook with Vinyl Coating. Install them on the studs according to the length of your bike.

**12.2** Cut sheets of 9/16" plywood for the bottom wheel holders. You will need four 1'-5" x 8 3/4" sheets.

**12.3** Secure the plywood with 2" wood screws.

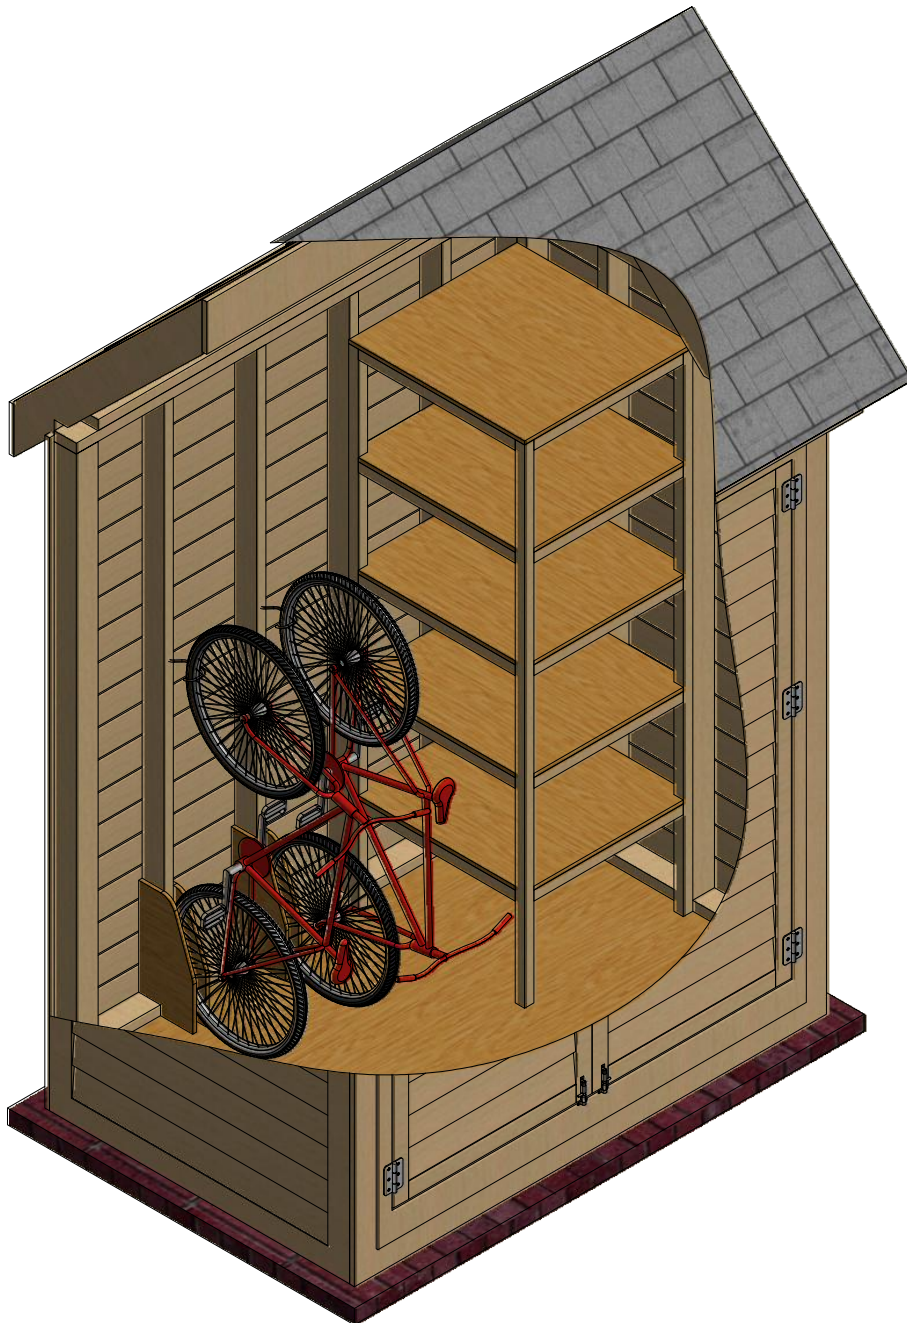

## STEP 13

### Shed Decoration

Now that your coop is all done, you are ready to decorate it any way you want using your favorite paint, stain, or preservative.



# Compare our Free vs. Premium plan

This perfectly designed plan will guide you through the entire process of building your very own shed for any backyard or garden.



Check out the benefits you would get with our **premium edition**:

Features	Free plan	Premium edition
Steps count	13	22
Illustrations for Each Step	✓	✓
Print Ready	✓	✓
Step By Step Instructions	✓	✓
Full Materials and Cuttings List	✗	✓
Additional Illustrations	✗	✓
Additional Blueprints	✗	✓
Tools List	✗	✓
Fastening Elements List	✗	✓
Technical Support	✗	✓

**BUY NOW**



For more great **HOW-TO** plans please visit: <https://shedplans.org>

## Copyright

The text and illustrations that appear here are the exclusive property of shedplans.org and are protected by federal copyright laws. The duplication, sale or distribution of any portion of these plans without prior written consent from the original designer will be subject to the appropriate penalties for copyright infringement. Sharing this plan on the web is only permitted with an indicated original source: <https://shedplans.org>